

GRP PREFILTERS

GFK VORFILTER



TECHNOL d.o.o.
ENGINEERING & GRP PRODUCTION L.t.d.



Prefilters

Characteristics:

Body: Fiberglass

Cover: Clear acrylique with quick opening

Fitting and screws: stainless steel

Sealing with an O-ring

Basket: Stainless steel

Color blue

Test pressure: 4bar

Options:

- Flange connection can be changed
- Prefilters according your specifications can be manufactured



Vorfilter

Eigenschaften:

Körper: Glasfaser-verstärktes Polyesterharz

Deckel: Klares Acryl-Glas mit Schnellverschluss System

Fittinge und Schrauben: Rostfreier Stahl

Abdichtung: mit O-Ring


Filterkorb: Rostfreier Stahl

Farbe: Blau


Prüfdruck: 4bar

Optionen:

- Flanschanschlüsse nach Wahl
- Vorfilter können nach Ihren Vorgaben gefertigt werden

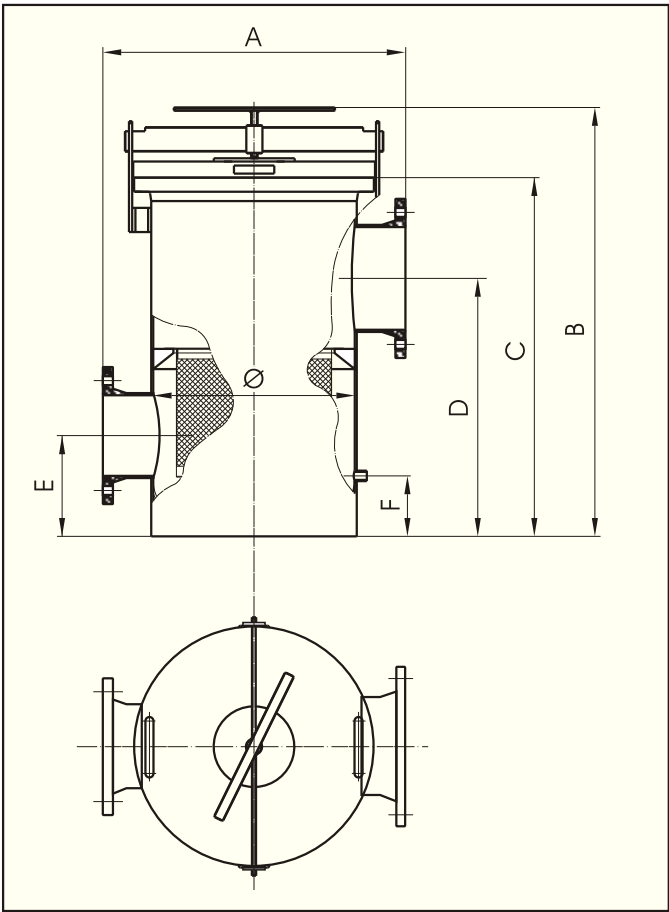

Prefilter Vorfilter	DN 200/8	DN 300/12	DN 400/24	DN 500/44
Ø	200	300	400	500
A	600	550	650	750
B	900	940	970	1070
C	710	750	790	890
D	560	580	570	640
E	230	205	225	250
F	50	120	125	150
DN	150	150	250	350
Volume of the strainer Volumen des Filterkorbs(l)	8	12	24	44
Free filtering surface Freie Filteroberfläche (cm ²)	1800	2200	2700	3800



TECHNOL Portorož d.o.o
PODJETJE ZA INŽENIRING IN PROIZVODNJO
IZDELKOV IZ UMETNIH MAS
Industrijska c. 6, 6310 IZOLA - SLOVENIJA
Tel.: ++386/5/6625-340 Fax: ++386/5/6625-341
E-mail: technol@stol.net www.technol.si